

# HYDROMATIC PRO 2HP

(Patented)

Pressure flow control automatic reset

Electronic pressure - flow control against dry running and water pumps direct control up 2HP.

The starting pump pressure is adjustable by means the + and - push buttons or AUTOMATICALLY according to the maximum pump pressure.

HYDROMATIC PRO 2Hp foresees the check control and pump stop for continuously pump working over 3 hours caused by a broken pipe or water leaking over 1 liter/minute

30.0\*130 2Hp foresees N° 9 automatic RESTART cycles attempt after a dry running

Cables with PLUG and SOCKET supplied on request

Pressure flow control automatic reset

Electronic pressure - flow control against dry running and water pumps direct control up 2HP.

The starting pump pressure is adjustable by means the + and - push buttons or AUTOMATICALLY according to the maximum pump pressure.

HYDROMATIC PRO 2Hp foresees the check control and pump stop for continuously pump working over 3 hours caused by a broken pipe or water leaking over 1 liter/minute


30.0\*130 2Hp foresees N° 9 automatic RESTART cycles attempt after a dry running

Cables with PLUG and SOCKET supplied on request




AUTOMATIC RESTART AGAINST THE MOTOR BLOCKING

AUTOMATIC STARTING PRESSURE SELF LEARNING

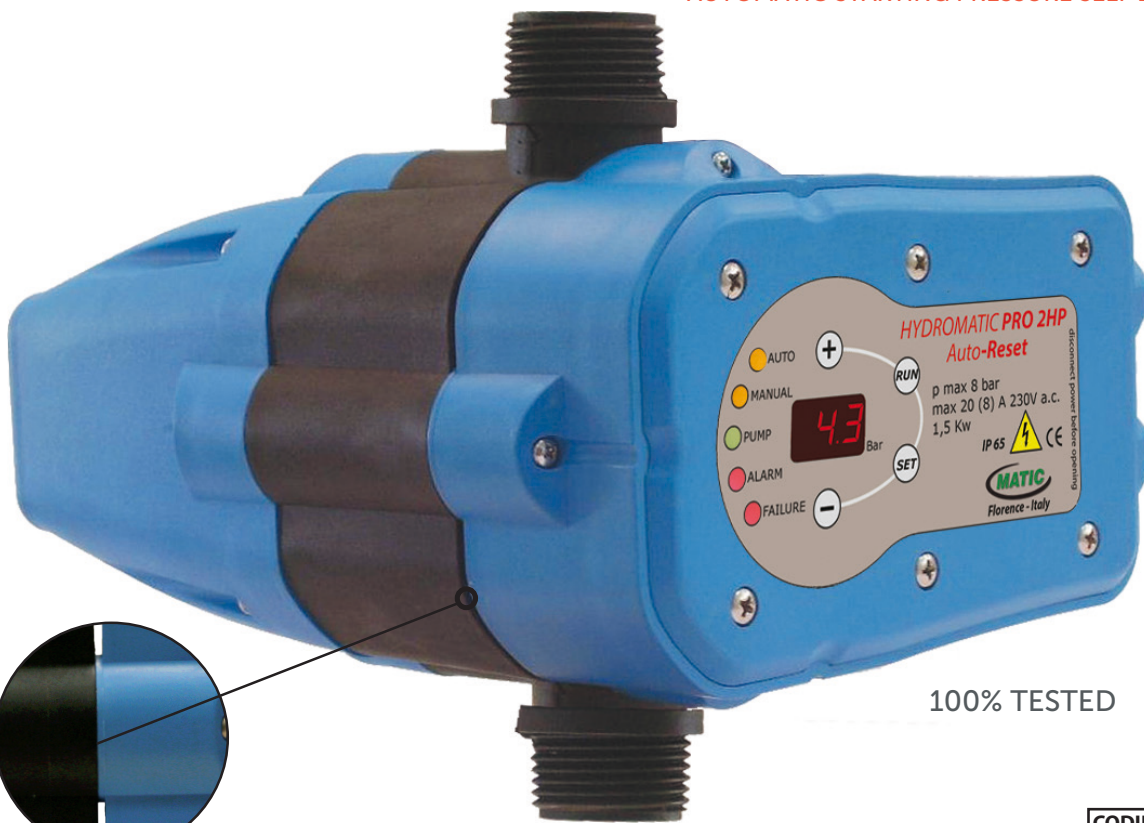

100% TESTED



Adjustable Pump Start Pressure  
range 0,5 - 6 bar

CODIFICAZIONE  
F C D

Alimentazione  
1 = 230V a.c.  
2 = 110V a.c.

Frequenza  
5 = 50Hz  
6 = 60Hz

A:OJ:G<:G	FhsgkkgZfhlhjZ	IP	L:LMJ:G<:H:	F:DK:BL	FBG:BL
POWER SUPPLY	MOTOR LOAD		WATER TEMPERATURE	MAX FLOW	MINIMUM FLOW
230V c.a. 50/60 Hz	2HP 250 V a.c.	65	60°C	100 l/m	1 l/m

# INSTALLAZIONE/INSTALLATION

